


Professional film made of colaminated polymer PVC (black and white), microperforated and coated with acrylic adhesive.

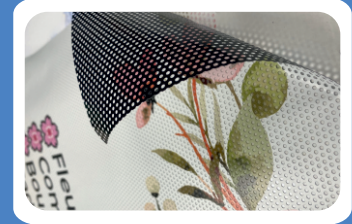

**Technical specifications :**

- Thickness: 160 microns
- Storage: -5°C to +40°C
- Perforation: 30%
- Thermoformable: No
- Satin finish / Satin print
- Protective liner:  
140 gr/m<sup>2</sup> siliconized PE paper
- Durability: over 5 years outdoor
- Temperature resistance: -20°C to +65°C

- Outdoor use
- 30% microperforated film
- Permanent
- Easy to install
- Water bonding
- Dry bonding



**Application:**

Substrate:  
Glass, aluminum, metal, varnished wood, varnished glass or carbon fiber, paint, rigid plastic

Application temperature: between 10 and 30°C

**!** Caution: This microperforated product may not be used on emergency exits of public transport vehicles (appendix 5 of Geneva regulation R43 or directive 92/22/EEC). The customer is advised to contact the relevant local authorities, who will establish the vehicle's compliance with the road regulations in force.



**Advice from mpa pro :**

We recommend wet mounting for stickers over 50cm.

Recommended application temperature: +20°C

**!** For vehicle rear windows, we recommend removing the rear wiper.

**Limit of use :**

- Wavy or highly irregular surfaces
- Substrates that do not have a clean, smooth surface
- Materials with low cohesion between paint and substrate
- Stainless steel
- Flexible supports
- 3-dimensional surfaces (e.g. balls, pyramids)

**Will not stick to the following materials:**

- Leather
- Unvarnished wood
- Textile



**Maintenance tip :**

Soapy water solution

**Installation video:**

