


Professional film made of colaminated polymer PVC (black and white), microperforated and coated with acrylic adhesive.

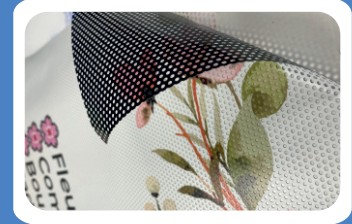

Technical specifications :

Thickness: 160 microns Storage: -5°C to +40°C
 Perforation: 30% Thermoformable: No
 Satin finish / Satin print
 Protective liner:
 140 gr/m² siliconized PE paper
 Durability: over 5 years outdoor
 Temperature resistance: -20°C to +65°C

Outdoor use
 30% microperforated film
 Permanent
 Easy to install
 Water bonding
 Dry bonding



Application:

Substrate:
 Glass, aluminum, metal, varnished wood, varnished glass or carbon fiber, paint, rigid plastic
 Application temperature: between 10 and 30°C

Advice from mpa pro :

We recommend wet application for stickers over 50cm.
 Recommended application temperature: +20°C

Limit of use :

Wavy or highly irregular surfaces
 Substrates that do not have a clean, smooth surface
 Materials with low cohesion between paint and substrate
 Stainless steel
 Flexible supports

Will not stick to the following materials:

Leather
 Unvarnished wood
 Textile



Maintenance tip :

Soapy water solution

Installation video:

